



JETWAVE®

HIGH PRESSURE CLEANERS

Distributed by:

SNIPPER™ 2900 psi • 10 l/pm



Petrol Driven



Cold Water



Frequent Usage

FIELDS OF APPLICATION

- Agricultural Equipment
- Car and Equipment Yards
- Concrete and Landscaping
- Motorcross Bike Wash-down
- Household and Path Cleaning



NEW

The Jetwave® Snipper™ is an entry level quality unit on a budget. Australian engineered and assembled using only the best quality Italian and global components.



HERO INNOVATIONS



Functional

Trolley configuration with tie down points.



Optimise

2 x anti-vibration non-marking front feet for quieter performance.



Durable

Innovative anti-corrosion nylon bearings and puncture proof tyres.

STANDOUT FEATURES



Triplex pump delivers performance and longer life.



Easy start HONDA™ GP200 Commercial Series OHV Engine.



Up to 6 x more abrasion resistant and anti-kink dual braid non-marking hose.



Dual M22 screw hose coupling system.



Brass washable inlet water filter.



Jetwave Safety System™ (JSS) thermal valve to prevent overheating in excessive bypass and over pressurisation.



0-30° variable spray patterns hi-lo (soap) nozzle.




Integrated accessory storage for hose, gun and lance.



Jetwave Group
 72-74 Richmond Road
 Keswick | Adelaide
 South Australia | 5035 | AU
 +61 8 8371 3599
 sales@jetwave.com.au
 jetwave.com.au

STANDARD EQUIPMENT

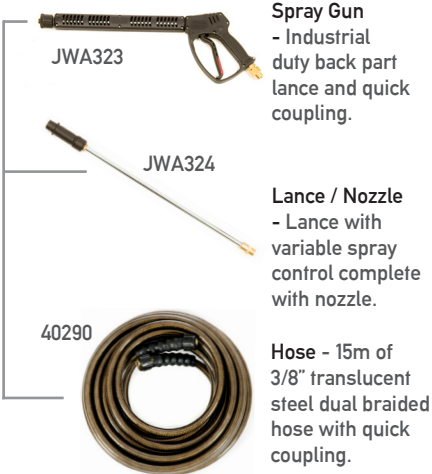

OPTIONAL ACCESSORIES

1. Complete Turbo Head with Lance	p/n	JWA167
2. 15m Extension High Pressure	p/n	40290
3. LS3-1 Foaming Lance with Tank	p/n	JWA221
4. Sandblasting Kit	p/n	JWA164
5. Drain Kit	p/n	HOP3X20

Ergonomics - Innovative trolley frame designed for durability.

Safety - Integrated accessory storage for safety.

Transportation - Robust welded trolley design.

Power - HONDA™ 200cc OHV engine.

Portability - Premium puncture proof tyres.



Product Code	p/n	CW2900-10P
--------------	-----	------------

TECHNICAL DATA

Working Pressure	psi / bar	2900 / 200
Flow Rate	l/pm	10
Max Water Inlet Temp	°c / °f	60 / 140
Class	grade	A (AS/NZS 4233.1:2013)

INTENDED APPLICATION

Usage Frequency	hours / type	1 daily / Intermittent
Category of Dirt / Debris	type	Light

MOTOR FEATURES

Engine	type	HONDA™ GP200 (4 stroke, air cooled)
Power	hp/cc	6.5 / 200
Fuel Supply	type	Unleaded
Fuel Capacity	litres	3.1
Low Oil Shutdown	y/n	Y
Starting System	type	Recoil / Pull

HYDRAULIC FEATURES

Pump / Head / Pistons	type	Annovi Reverberi (AR) Plunger Triplex / Brass / Ceramic
Motor Pump Coupling	type	Direct Drive
Pump Speed	rpm	3400
Unloader Valve	type	Integral
Safety Valve	y/n	Y
Orifice / Nozzle	size	035

OTHER FEATURES

Adjustable Pressure	y/n	Y
Hose Reel Provision	y/n	N
Frame Structure	type	2-wheel trolley with heavy gauge zinc steel
Onboard Accessory Storage	y/n	Y
Detergent Injector	y/n	Y - Downstream low pressure

DIMENSIONS & WEIGHT

Approx Weight	kg	44 unit / 52 boxed
Unit Dimensions	mm	700(L) x 600(W) x 920(H)
Boxed Dimensions	mm	640(L) x 600(W) x 580(H)
Number per Pallet	type: pieces	AS: 4 or 8 / Euro: 2 or 4

WARRANTY(S)

Motor Warranty	years	2	
Limited Pump Warranty	years	1	
Limited Frame Warranty	years	5	
Limited Accessory Warranty	days	90	

POWERED by HONDA™

The manufacturer reserves the right to modify design features and technical facts without notice, due to our principals of continuous improvement.

V1.0 10/2017

*Coverage against defects in material and workmanship (refer to Jetwave's and component partners T&Cs).